




BEARING USA CORP.

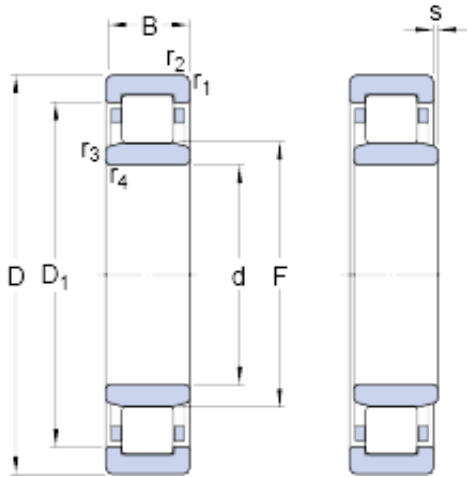

20 mm x 52 mm x 21 mm SKF NU 2304 ECP
Ball bearing

Bearing No. NU 2304 ECP

NU 2304 ECP Bearing 2D drawings and 3D CAD models

Size	52x20x21 mm
Bore Diameter	52 mm
Outer Diameter	20 mm
Width	21 mm
d	20 mm
D	52 mm
B	21 mm
D ₁	41.85 mm
F	27.5 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
s	1.9 mm
d _a - min.	24.1 mm
d _a - max.	26.2 mm
d _b - min.	29 mm
D _a - max.	45.4 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	47.5 kN
Basic static load rating - C ₀	38 kN
Fatigue load limit - P _u	4.8 kN
Reference speed	15000 r/min
Limiting speed	18000 r/min
Calculation factor - k _r	0.25



BEARING USA CORP.

Category	Cylindrical Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.217
EAN	7316577029133
Product Group	B04144
Bore Profile	Straight
Cage Material	Polymer
Precision Class	RBEC 1 ISO P0
Number of Rows of Rollers	Single Row
Separable	Inner Ring - Both Sides
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C0-Medium
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	High Capacity Plain Inner Ring 2 Rib Outer Ring Cage on Outer Ring ID
Long Description	20MM Bore; Straight Bore Profile; 52MM Outside Diameter; 21MM Width; Polymer Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium Int
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing



BEARING USA CORP.

Manufacturer URL	http://www.skf.com
Manufacturer Item Number	NU 2304 ECP
Weight / LBS	0.478
Width	0.827 Inch 21 Millimeter
Bore	0.787 Inch 20 Millimeter
Outside Diameter	2.047 Inch 52 Millimeter
bore diameter:	20 mm
precision rating:	RBEC 1 (ISO Class Normal)
outside diameter:	52 mm
maximum rpm:	18000 RPM
overall width:	21 mm
bearing material:	Steel
flanges:	(2) Outer Ring
cage material:	Polyamide
bore type:	Straight
finish/coating:	Uncoated
number of rows:	1
closure type:	Open
internal clearance:	C0
application:	Piston Type Machines, Rolling Mills, Spindles/Machine Tools
ring separation:	Separable Ring
outer ring width:	21 mm
operating temperature range:	Maximum of +300 ° F
fillet radius:	1 mm
dynamic load capacity:	47.5 kN
series:	NU23
static load capacity:	38 kN
D ₁	41.85 mm
r _{1,2} min.	1.1 mm



BEARING USA CORP.

$r_{3,4}$ min.	0.6 mm
s max.	1.9 mm
d_a min.	24.1 mm
d_a max.	26.2 mm
d_b min.	29 mm
D_a max.	45.4 mm
r_a max.	1 mm
r_b max.	0.6 mm
Basic dynamic load rating C	47.5 kN
Basic static load rating C_0	38 kN
Fatigue load limit P_u	4.8 kN
Calculation factor k_r	0.25
Limiting value e	0.3
Axial load factor Y	0.4
Mass bearing	0.21 kg